



Project Name:

Date:

Catalog #:

Fixture Type:

Comments:

The DMP Family of LED luminaires is available in two configurations, in two wattages, with an IES Type V distribution. They are designed to replace traditional exterior lighting systems up to 100w. Typical applications include wall sconce and small walkway canopy lights. In the "H" specification, it may also be used to replace up to 175W MH or HPS fixtures for parking garages and entranceways. The DMP Series has been specifically designed to meet or exceed the stringent Florida Fish & Wildlife requirements for exterior wildlife-friendly lighting requiring monochromatic Amber-Orange or Red lights. Bespoke Nichia or Cree LEDs operate between 585 and 625 nm, greater than 560nm required for wildlife protection. Typical applications include balconies, covered exterior walkways, stairwells, and alcove lighting. The DMP-01 is designed for replacement of balcony wall sconces, the DMP-02 variant is designed to be surface mounted at heights up to 12' for exterior walkway lighting. Mounting heights of 6 to 14 feet can be used based on light level and uniformity requirements.

## HOUSING

Low Profile T-6061 Aluminum Housing, Full shielding provided as standard on all units to provide maximum compliance with applicable regulations.

## LENS

Molded UV-Resistant Acrylic Optical Lens Designed for optimum downward light dispersion while meeting or exceeding dark sky requirements.

## MOUNTING OPTIONS

Included Easy-mount Bracket Fits Standard 4" Electrical Box, Allowing One-Person Installation. Optional Mounts Available.

## DRIVER AND LED

U.L. Listed Universal voltage 120-277V standard dimmable driver, Proprietary design SinkPAD™ Nichia® or CREE Amber LED boards DMP-01V 8W (System 9.5W), DMP-01VH 16w (System 19W) All components are field serviceable and carry a ten (10) year warranty.

## LISTINGS AND RATINGS

All electrical components are U.L. listed or recognized CSA listed for wet locations, ANSI/UL 1598, 8750 (damp locations when used with LVN), IP65 sealed LED compartment, U.S.A. Buy American Act compliant.

## DMP Wildlife Certified Lighting

### Walkway Ceiling Mount



### Dimensions

Height: 8"

Width: 6"

Depth: 6"

Fixed Shield: 5.5"

ILG Turtle Lighting • 58 Vine St. • Birmingham, AL 35213

J. Randall Pitts, Jr. • (205) 401-6739 • randall@industrialightinggroup.com

Dennis Sweeney • (205) 966-5632 • dennis@industrialightinggroup.com

[www.TURTLELEDS.com](http://www.TURTLELEDS.com) [www.IndustrialLightingGroup.com](http://www.IndustrialLightingGroup.com)





ILG




Industrial Lighting

# Model Options and Chromaticity

SERIES DMP	MODEL 01	WATTAGE 10W	VOLTAGE UNV	COLOR AMBER	OPTICS TYPE V	FINISH BZ	OPTIONS
DMP	02 (ceiling mount) 02H (ceiling mount)	8W (950 lm) 16W (1700 lm)	120-277V	Amber/Orange or Red	V	BZ-Bronze WH- White C- Custom	SP-(10kV surge) PC-Photocell

NICHIA STS-DA1-3863C <Cat.N

## CHROMATICITY DIAGRAM

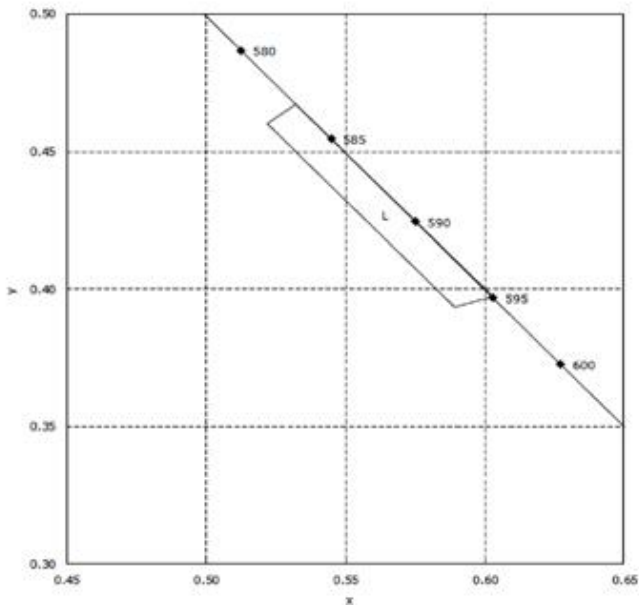

ILG Turtle Lighting • 58 Vine St. • Birmingham, AL 35213

J. Randall Pitts, Jr. • (205) 401-6739 • randall@industrialightinggroup.com

Dennis Sweeney • (205) 966-5632 • dennis@industrialightinggroup.com

[www.TURTLELEDS.com](http://www.TURTLELEDS.com) [www.IndustrialLightingGroup.com](http://www.IndustrialLightingGroup.com)

