

The DMP Family of LED luminaires is available in two configurations, in two wattages, with an IES Type V distribution. They are designed to replace traditional exterior lighting systems up to 100w. Typical applications include wall sconce and small walkway canopy lights. In the "H" specification, it may also be used to replace up to 175W MH or HPS fixtures for parking garages and entranceways. The DMP Series has been specifically designed to meet or exceed the stringent Florida Fish & Wildlife requirements for exterior wildlife-friendly lighting requiring monochromatic Amber-Orange or Red lights. Bespoke Nichia or Cree LEDs operate between 585 and 625 nm, greater than 560nm required for wildlife protection. Typical applications include balconies, covered exterior walkways, stairwells, and alcove lighting. Mounting heights of 8 to 20 feet can be used based on light level and uniformity requirements. The DMP-03 is specifically designed for parking garages and exterior pole lighting.

DMP Wildlife Certified Lighting

Garage & Site Lighter

HOUSING

Low Profile T-6061 Aluminum Housing, Full shielding provided as standard on all units to provide maximum compliance with applicable regulations.

LENS

Molded UV-Resistant Acrylic Optical Lens Designed for optimum downward light dispersion while meeting or exceeding dark sky requirements.

MOUNTING OPTIONS

Included Easy-mount Bracket Fits Standard 4" Electrical Box, Allowing One-Person Installation. Optional Mounts Available.

DRIVER AND LED

J.L. Listed Universal voltage 120-277V standard dimmable driver, Proprietary design SinkPAD™ Nichia® or CREE Amber LED boards DMP-03 36W (System 40W), DMP-03 76w (System 80W)
All components are field serviceable and carry a ten (10) year warranty.

LISTINGS AND RATINGS

All electrical components are U.L. listed or recognized CSA listed for wet locations, ANSI/UL 1598, 8750 (damp locations when used with LVN), P65 sealed LED compartment, U.S.A. Buy American Act compliant.



Dimensions

Height: 12"
Width: 12"
Depth: 8"
Fixed Shield: 6"



ILG




Industrial Lighting

Model Options and Chromaticity

| SERIES DMP | MODEL 03 | WATTAGE 47W | VOLTAGE UNV | COLOR AMBER | OPTICS TYPE V | FINISH BZ | OPTIONS |
|------------|--------------------|--------------------------------|-------------|---------------------|---------------|-------------------------------------|--|
| DMP | 03 (ceiling mount) | 36W (3900 lm) 76W (6850 lm) | 120-277V | Amber/Orange or Red | V | BZ-Bronze WH- White C- Custom | SP-(10kV surge) PC-Photocell TN- Tenon Arm |

NICHIA STS-DA1-3863C <Cat.N

CHROMATICITY DIAGRAM

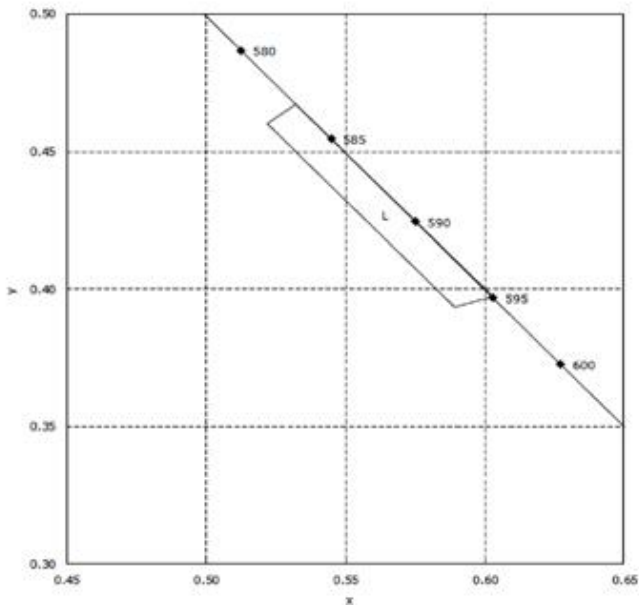

ILG Turtle Lighting • 58 Vine St. • Birmingham, AL 35213

J. Randall Pitts, Jr. • (205) 401-6739 • randall@industrialightinggroup.com

Dennis Sweeney • (205) 966-5632 • dennis@industrialightinggroup.com

www.TURTLELEDS.com www.IndustrialLightingGroup.com

